TWN4 SMARTCARD HOUSING HIP2

PLASTIC HOUSING FOR COMBINED CONTACT & CONTACTLESS READERS



The TWN4 SmartCard Housing HIP2 is designed for attachment of TWN4 MultiTech SmartCard RFID readers to Hewlett Packard printers with HIP2 pocket place holder only.

Special features:

- + upon request the housing can be delivered with customized inlay
- + compatible only with TWN4 MultiTech SmartCard PCB reader
- + 3D construction data (STEP) available on request

TECHNICAL DATA

DIMENSIONS (L X W X H)	83 mm x 66.6 mm x 39 mm / 3.27 inch x 2.62 inch x 1.54 inch
MATERIAL	ABS UL94-V0, color: black
TEMPERATURE RANGE ¹⁾	-25 °C up to +70 °C (-13 °F up to +158 °F)
WEIGHT	Approx. 29 g (with inlay; without reader inside)
CERTIFICATIONS	RoHS-II compliant
PACKAGE CONTENTS	ABS housing
ORDER CODE(S)	HOSW-B (without inlay) HOSW-BE2 (with inlay)

¹⁾ Specification only for housing without a reader





































Ticket POS

PC Log-





Driver ID


Vending


Parkin


Ga

Locker Locks

MEASUREMENTS TEMPLATE*



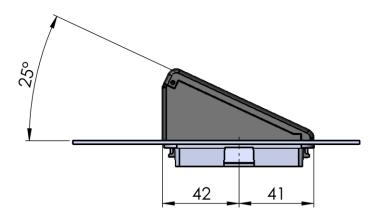



*All drawing measurements in mm



ELATEC GmbH • Zeppelinstr. 1 • 82178 Puchheim • Germany P +49 89 552 9961 0 • F +49 89 552 9961 129 • E-Mail: info-rfid@elatec.com elatec.com

Elatec reserves the right to change any information or data in this document without prior notice. Elatec declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.